


M5G

Blok Silindir / Block Cylinder

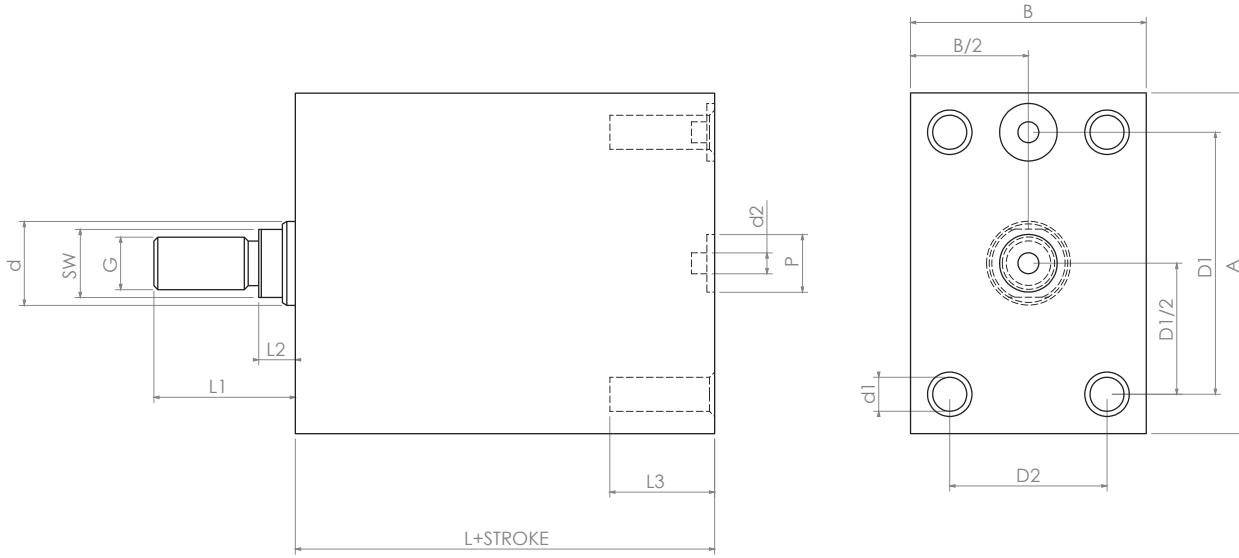

Piston Çapı / Bore : Ø25 – Ø100

Mak. Çalışma Basıncı / Max. Working Pressure : 0 – 500 Bar

Sızdırmazlık / Sealing : Nbr – Pu – Viton

Stroke (Opsiyon Mevcut / Option Available) : 10mm – 200 mm

M5G	Ø Piston	Ø Mil	A	B	d	d1	d2	P	D1	D2	G	L	L1	L2	SW	L3
	Ø Bore	Ø Rod														
	25	16	65	45	16	M8x1,5	4	11	50	30	M10x1,5	70	27	7	13	20
	32	20	75	55	20	M10x1,5	4	11	55	35	M12x1,5	75	30	10	16	25
	40	25	85	63	25	M10x1,5	4	11	63	40	M12x1,5	85	35	10	21	30
	50	28	100	75	28	M10x1,5	5	14	76	45	M16x2	90	40	10	24	30
	63	36	125	95	36	M16x2	6	16	95	65	M20x2,5	110	54	14	32	40
	80	45	160	120	45	M20x2,5	7	20	120	80	M27x3	120	64	14	40	40
	100	56	200	150	56	M24x3	8	20	158	108	M36x4	130	75	15	50	50