


# MC2

## Blok Silindir / Block Cylinder

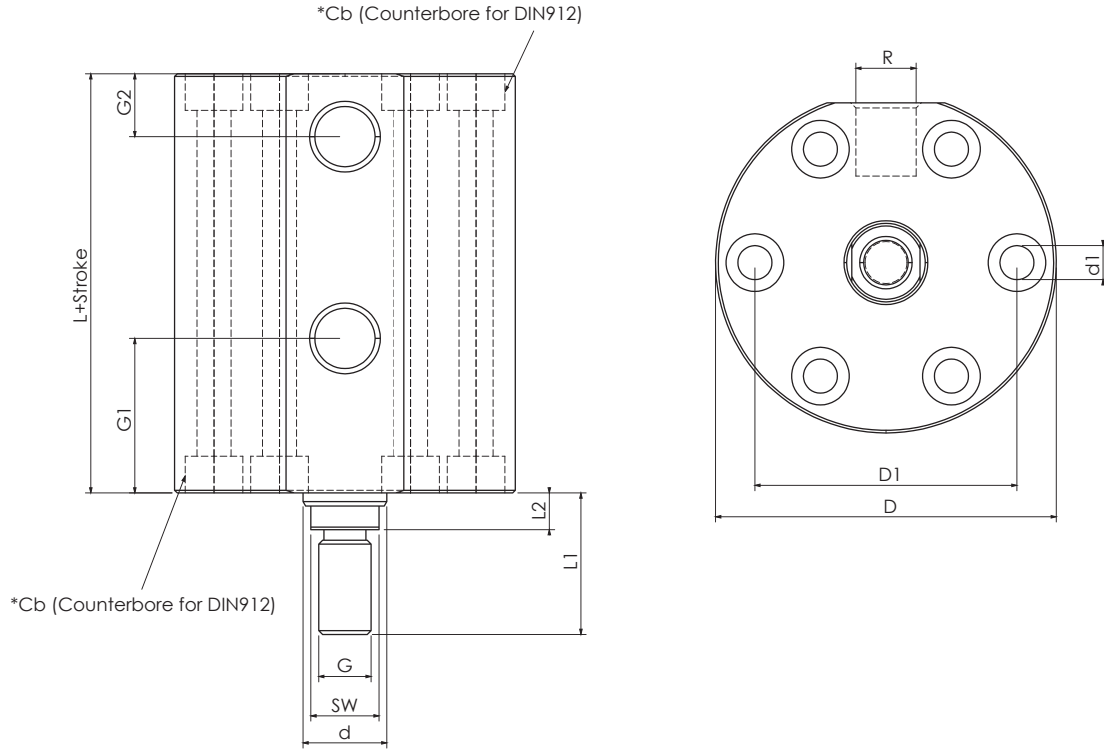

Piston Çapı / Bore : Ø25 – Ø100

Mak. Çalışma Basıncı / Max. Working Pressure : 0 – 500 Bar

Sızdırmazlık / Sealing : Nbr – Pu – Viton

Stroke (Opsiyon Mevcut / Option Available) : 10mm – 200 mm

| MC2 | Ø Piston | Ø Mil | D   | D1  | d  | d1   | G         | G1   | G2   | L   | L1 | L2 | R     | SW |
|-----|----------|-------|-----|-----|----|------|-----------|------|------|-----|----|----|-------|----|
|     | Ø Bore   | Ø Rod |     |     |    |      |           |      |      |     |    |    |       |    |
|     | 25       | 16    | 65  | 50  | 16 | 6,5  | M10 x 1,5 | 29,5 | 12   | 70  | 27 | 7  | G1/4" | 13 |
|     | 32       | 20    | 75  | 58  | 20 | 9    | M12 x 1,5 | 34,5 | 12   | 75  | 30 | 10 | G1/4" | 17 |
|     | 40       | 25    | 90  | 70  | 25 | 11   | M12 x 1,5 | 34,5 | 12   | 85  | 35 | 10 | G1/4" | 21 |
|     | 50       | 28    | 100 | 80  | 28 | 11   | M16 x 2   | 39,5 | 12   | 90  | 40 | 10 | G1/4" | 24 |
|     | 63       | 36    | 125 | 100 | 36 | 13,5 | M20 x 2,5 | 45,5 | 19,5 | 110 | 54 | 14 | G3/8" | 32 |
|     | 80       | 45    | 160 | 130 | 45 | 17   | M27 x 3   | 44,5 | 19,5 | 120 | 64 | 14 | G1/2" | 40 |
|     | 100      | 56    | 200 | 160 | 56 | 21   | M36 x 4   | 52   | 23   | 130 | 75 | 15 | G1/2" | 50 |